



Single torque clutchable torque screwdrivers

40-MC-3
40-MC-...

SAM Outillage

10 rue Camille de Rochetaillée
42000 Saint-Etienne - France

RCS Saint-Etienne B 338 002 231 | SAS au capital de 8 189 583 €

<https://www.sam-outillage.com/>

Photos and texts not contractually binding. Do not litter. Document generated on 2024-04-20 17:19:50





DESCRIPTION

Single torque clutchable torque screwdrivers

IMPOSSIBLE TO EXCEED THE TORQUE VALUE: thanks to the automatic disengagement system. SAFETY: Impossible for the operator to change the torque value. VERSATILE: 1/4" square or 6-flat output for use with sockets and bits.

Disengageable screwdriver with automatic resetting. Ideal for repetitive production tasks. Functions for tightening and loosening. Driven by 1/4" 6-flat hollow head drive or 1/4" radio square (see table). Torque to be adjusted on calibration bench. Precision: +/- 6%. Each screwdriver is numbered and supplied with a calibration certificate. This is a single-torque-value wrench, please indicate your desired torque value (Nm) when placing your order.

STANDARDS / DIRECTIVES

NF ISO 6789-1

SAM Outillage

10 rue Camille de Rochetaillée
42000 Saint-Etienne - France


RCS Saint-Etienne B 338 002 231 | SAS au capital de 8 189 583 €

<https://www.sam-outillage.com/>

Photos and texts not contractually binding. Do not litter. Document generated on 2024-04-20 17:19:50



SPECIFIC DATA

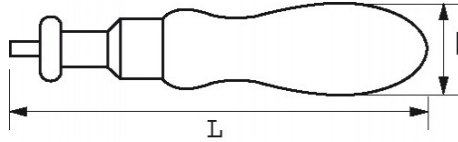

Designation	TORQUE SCREWDRIVER SQUARE DISENGAGEABLE MONO-TORQUE 1/4"
Sales reference	40-MC-3
L (mm)	143
Weight (kg)	0.21
D (mm)	26
Capacity	0,2 - 1,3 Nm
drive	1/4"
Guarantee	M

Guarantee applied

M1 | SAM Equipment and Machine Guarantee:

Guarantee for a limited period, covering technical tools, devices and machines used under normal conditions. The length is given by the number after the letter M: 1 to 5 years

>> [Find out more](#)

SAM Outillage

10 rue Camille de Rochetaillée
42000 Saint-Etienne - France

RCS Saint-Etienne B 338 002 231 | SAS au capital de 8 189 583 €

<https://www.sam-outillage.com/>

