SAMTITAN® bolt-cutter, forged arms, axial cutting

CB-0-AT

CB-...-AT

SAM Outillage
10 rue Camille de Rochetaillée
42000 Saint-Etienne - France
RCS Saint-Etienne B 338 002 231 | SAS au capital de 8 189 583 €
https://www.sam-outillage.com/

Photos and texts not contractually binding. Do not litter. Document generated on 2024-04-26 00:12:16

CB-0-AT
SAMTITAN® bolt-cutter, forged arms, axial cutting

DESCRIPTION

SAMTITAN® bolt-cutter, forged arms, axial cutting

ROBUST:

Forged arms for perfect resistance to extreme worksite conditions.

Straightening possible in the case of accidental twisting.

Non-deformable forged blades assembled by riveting. Blade hardness: 63.5 HRC.

COMFORT

Sheathed handles for a perfect grip.

SIMPLICITY:

Quick, easy adjustment of the blade gap with just one screw.

Photos and texts not contractually binding. Do not litter. Document generated on 2024-04-26 00:12:16

CB-0-AT
SAMTITAN® bolt-cutter, forged arms, axial cutting

POWERFUL: Cutting capacity of up to dia. 16 mm.

Cutting angle designed for penetrating and shearing steels up to 140 kg / mm2.

COMPACT:

The bolt-cutter blades are assembled by riveting (and not by bolting as is the case with most bolt-cutters).

This attachment system has several advantages:

reduced thickness, great operating flexibility, no risk of loosening, no risk of play, blade alignment maintained for perfect cutting.

Forged arms for perfect resistance to extreme worksite conditions.

Sheathed handle for a comfortable grip.

Quick adjustment of the blade separation with a single screw.

Non-deformable forged blades assembled by riveting.

Cuts all types of profiles.

Capacities:

C1: 60 kg/mm²

C2: 80 kg/mm²

C3: 110 kg/mm²

C4: 140 kg/mm²

SPECIFIC DATA

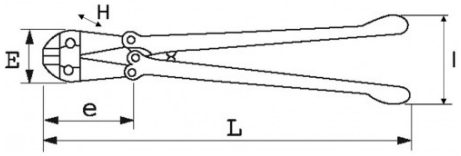

Designation	SAMTITAN BOLT-CUTTER AXIAL CUT NO 0

Photos and texts not contractually binding. Do not litter. Document generated on 2024-04-26 00:12:16

CB-0-AT
SAMTITAN® bolt-cutter, forged arms, axial cutting

Sales reference	CB-0-AT
L (mm)	460
E (mm)	70
Weight (kg)	1.62
l (mm)	120
H (mm)	30
e (mm)	118
L"	18
C1 60 kg/mm²	9
C2 80 kg/mm²	8
Replacement Blades	CB-0-AL
C4 140 kg/mm²	6
C3 110 kg/mm²	7
Guarantee	O

Guarantee applied

O | SAM TOOL guarantee.
Guarantee without time limit on the tools used under normal conditions.

>> Find out more

SAM Outillage
10 rue Camille de Rochetaillée
42000 Saint-Etienne - France
RCS Saint-Etienne B 338 002 231 | SAS au capital de 8 189 583 €
https://www.sam-outillage.com/

Photos and texts not contractually binding. Do not litter. Document generated on 2024-04-26 00:12:16