



## High power torque multipliers

**ML-925**

ML-525/ML-725/ML-925

### SAM Outillage

10 rue Camille de Rochetaillée  
42000 Saint-Etienne - France

RCS Saint-Etienne B 338 002 231 | SAS au capital de 8 189 583 €

<https://www.sam-outillage.com/>

Photos and texts not contractually binding. Do not litter. Document generated on 2024-04-29 13:10:55





## DESCRIPTION

### High power torque multipliers

**PRECISION GUARANTEED:** +/- 4% with the SAM torque multipliers.**UTILISATION SAFETY:** replaces extensions and handmade long levers.**IMPOSSIBLE TO OVERSHOOT THE TORQUE VALUE:** thanks to the torque limiting mechanism.**COMPACT:** enables use in confined spaces.**SAFETY:** supplied with a fulcrum system for safety.

Ideal for tightening and loosening very high torque values. Constant multiplication factor of x25. Multiplier with 3-position anti-return ratchet: tightening, loosening and neutral to facilitate a quick approach. For version ML-525 supplied with an adjustable support point enabling the utilisation of a socket to be attached on the head of a nut. For versions ML-725 and ML-925 supplied with an adjustable flat support point. Supplied in a box to facilitate transport.

**RECOMMENDATIONS FOR YOUR SAFETY** Given the forces generated, the use of torque multipliers requires simple, but vital, safety measures:- To be sure of controlling the output force always use a torque wrench. Never use an impact wrench type tool.- Check that the support point can withstand the output torque value.- Preferably use "impact" sockets locked with a clip and pin.- Never attempt to exceed the multiplier's indicated maximum value. You would risk breaking the pinions, with all the dangers caused by the restitution force.

#### SAM Outillage

10 rue Camille de Rochetaillée  
42000 Saint-Etienne - France

RCS Saint-Etienne B 338 002 231 | SAS au capital de 8 189 583 €


<https://www.sam-outillage.com/>



**STANDARDS / DIRECTIVES**

NF ISO 1174-1

**SPECIFIC DATA**

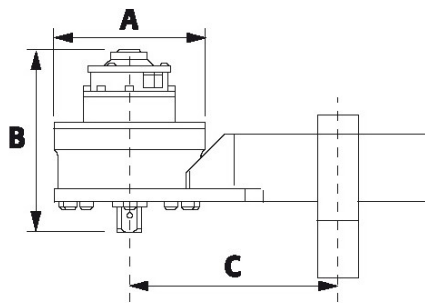

Designation	TIGHTENING TORQUE MULTIPLIER 9500 NM
Sales reference	ML-925
Weight (kg)	28.6
D (mm)	-
A (mm)	184
Maximum output torque Nm	9500
Maximum output torque Ft.lb	7030
C min mm	171
C max mm	351
output square "	1"1/2

**SAM Outillage**

10 rue Camille de Rochetaillée  
 42000 Saint-Etienne - France

RCS Saint-Etienne B 338 002 231 | SAS au capital de 8 189 583 €

<https://www.sam-outillage.com/>



input square "	3/4"
Maximum input torque Nm	380
B (mm)	209
Guarantee	M

**Guarantee applied****M1 | SAM Equipment and Machine Guarantee:**

Guarantee for a limited period, covering technical tools, devices and machines used under normal conditions. The length is given by the number after the letter M: 1 to 5 years

[>> Find out more](#)

**SAM Outillage**

10 rue Camille de Rochetaillée  
42000 Saint-Etienne - France

RCS Saint-Etienne B 338 002 231 | SAS au capital de 8 189 583 €

<https://www.sam-outillage.com/>

Photos and texts not contractually binding. Do not litter. Document generated on 2024-04-29 13:10:55

